

050 Series (Interchangeable with Camozzi 5000 Series, Rectus 21 Series, Maxsafe C21 Series)



Mini industrial coupling, the world's most commonly used profile. Above average flow performance for liquid and gaseous media. Large band width in materials and valve variants.

Advantages

- Single handed operation
- Small dimensions
- All versions interchangeable

Coupling Specifications

- Back Body: Brass (MS 58) Nickel Plated
- Valve Body: Brass (MS 58) Nickel Plated
- Sleeve: Brass (MS 58) Nickel Plated
- Spring and Locking Ring: Stainless Steel 301
- Locking Balls: Stainless Steel 301
- Seals: NBR

Plug Specifications

- Plug Body: Brass (MS 58) Nickel Plated


Working Temperature (Depending on Medium)

- -20°C to +100°C (NBR)
- -40°C to +130°C (EPDM)
- -15°C to +200°C (Viton)



Working Pressure

35 Bar - maximum static working pressure with safety factor of 4 to 1.

PLUG PROFILE

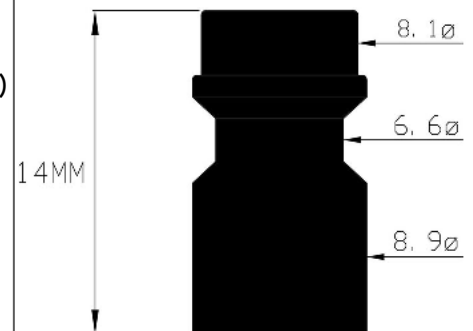

FLOW RATES

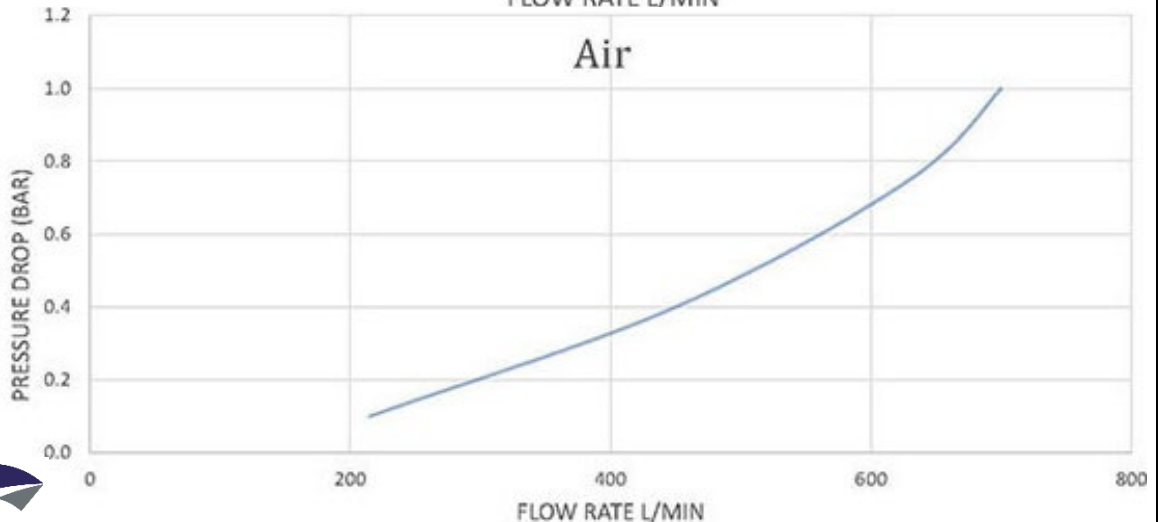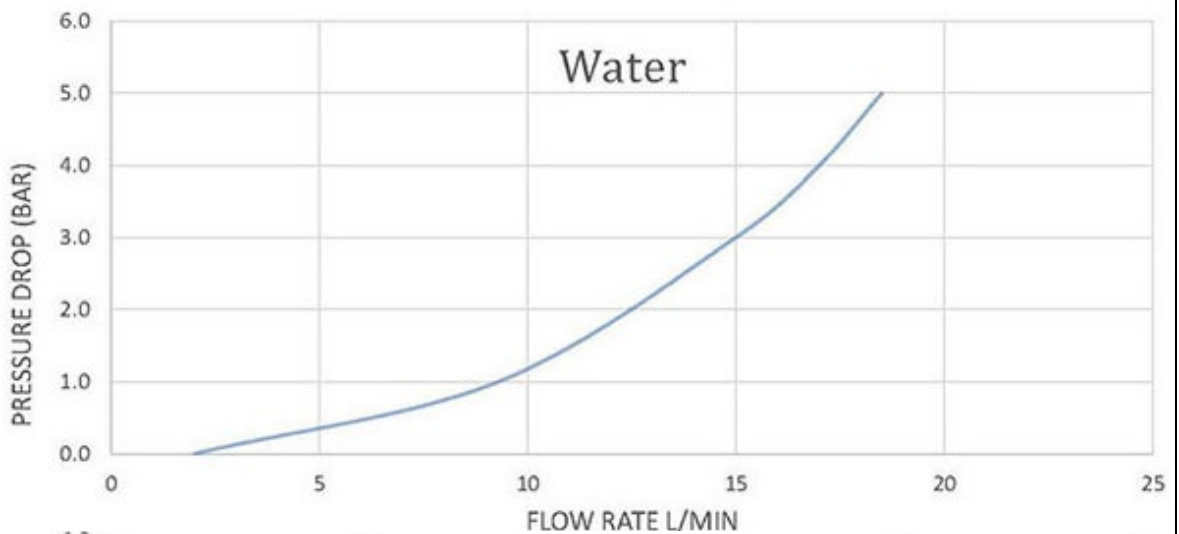

Commercial & Industrial Gauges Ltd

Commercial & Industrial Gauges Ltd,
Unit 7, Coed Aben Road,
Wrexham Industrial Estate, LL13 9UH

Tel: +44 (0) 1978 661 704
Email: sales@cigltd.co.uk
Web: cigltd.co.uk